


Questo documento mette in evidenza una configurazione di NAT inside ed outside su router cisco 2611

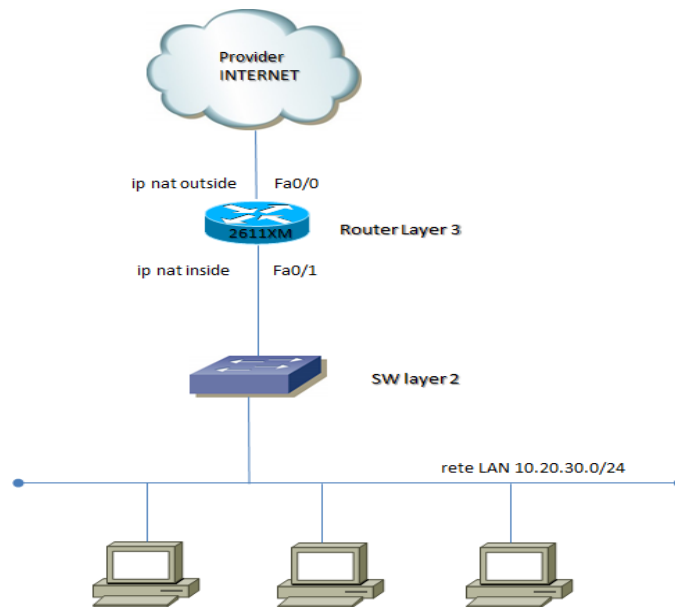

Configuration NAT:

```
interface FastEthernet0/0
ip address a.b.c.202 255.255.255.248
ip nat outside
ip virtual-reassembly
!
interface FastEthernet0/1.1320
description <LAN>
encapsulation dot1Q 10
ip address 10.20.30.1 255.255.255.0
ip nat inside
ip virtual-reassembly
!
ip nat inside source list INTERNET interface FastEthernet0/0 overload
!
ip access-list extended INTERNET
permit ip 10.20.30.0 0.0.0.255 any
```